


### Components:

- 1) 3 Rolls of 72" Rawhide lacing
- 2) 2oz. Bottle Of Conditioning Oil
- 3) U-Wire Needle (laces the glove)
- 4) Wooden Handle Leather Punch (makes hole in lace)
- 5) Wooden Handle Lacing Tool (makes hole bigger in glove and can also lace glove)
- 6) Brush (cleans glove)
- 7) Hand Mitt (use to rub oil into glove)
- 8) Carry Bag

### Instructions for lacing


- A) Punch hole at end of rawhide lace with Wooden Handle Leather Punch (Part 4).

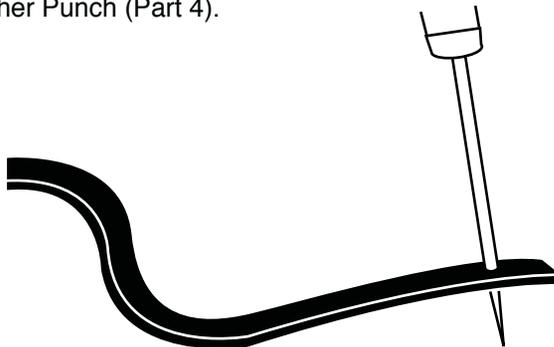


- B) Place U-Wire Needle (Part 3) through rawhide lace where hole is punched.



- C) Review carefully how the glove is laced and knotted in the section to be repaired.

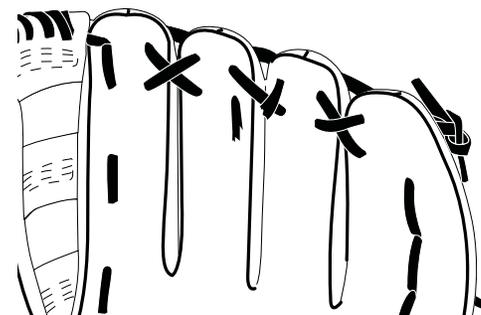

- D) Starting at the knot of the section to be replaced, untie the knot and remove a small portion of the old lace. Start relacing the glove by following the path of the old lace. When you meet the old lace again repeat the process. Continue in this manner until you reach the end of the old lace. Remove needle from lace and tie ends as was originally knotted.

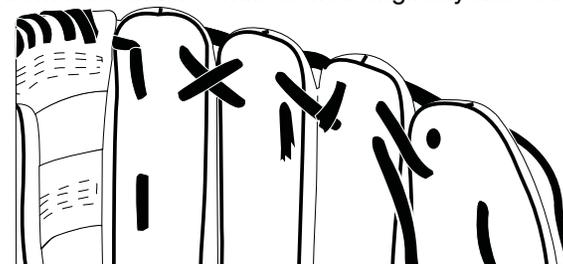

Notes: Be sure while lacing, that the lacing does not become twisted. Also leave enough lace at the beginning and end of the process to re-knot the new lace when finished.

### CAUTION:

Always lace the glove with the needle pointing away from you, keeping the needle away from your face and body. Never pull the needle towards your body or your face.

Job Number: 109765	File Name: 1569 GloveCondishIM.ai	Product Division: BB Train	Product Line: CORE 2014	Original Artist:	Last Modified By: Mary Ellen Mazzoli	Date Created: 3.29.13	Date Approved On:
Primary Pantone Color Palette 4 color process							Pantone Spot Color
Secondary Pantone Color Palette 4 color process							
Logo Color Pantone Palette 4 color process							
Creative Manager Approval:	Product Manager Approval:	Traffic Manager Approval:	Legal Approval:				
Fonts Used: Arial				Style Guide Reference or Job Number Reference: _____			

**Directions for applying glove oil:**

Shake well. Wipe glove clean with hot, damp towel then let dry. Work a generous amount of oil into front and back of glove with hand mitt and let dry. Excess oil can be wiped off with a towel. Apply second application in palm of glove and, while wet, form pocket by playing catch.

- Store a ball in the glove pocket to maintain shape when not in use.
- Reapply oil as needed.

# ***Franklin***<sup>®</sup>

## **ITEM #1569**

### ***DR. GLOVE CONDITIONING, LACING AND RELACING KIT***

**Franklin Sports Inc.  
Stoughton, MA 02072  
Made in China**

**For replacement parts call  
1-781-341-5178 or 1-800-225-8649  
OR visit [www.franklinsports.com](http://www.franklinsports.com)**